


Create new event action

This action requires the "**create event action**" permission.

To add a new event action, navigate to the "**Add new action**" form, by pressing the "+" button in the top right corner above the table.

Event actions				Q Search...	+	x		
<input type="checkbox"/>	NAME ^	FAIL ON ERROR	NOTIFY ON ERROR	ENABLED	ACTIONS			
<input type="checkbox"/>	Change status when awaited product is booked to stock	✗	✓	✓				
<input type="checkbox"/>	Change work order CNC status to "in process"	✓	✓	✓				
<input type="checkbox"/>	Change work order quality control status when fully reserved	✓	✓	✗				
<input type="checkbox"/>	Close QC Tasks on ready for delivery	✗	✓	✓				
<input type="checkbox"/>	Create biokrat partner	✓	✓	✗				
<input type="checkbox"/>	Create biokrat product	✓	✓	✗				
<input type="checkbox"/>	Create end customer partner send mail	✓	✓	✓				
<input type="checkbox"/>	Delete biokrat partner	✓	✓	✗				
<input type="checkbox"/>	EUC check	✓	✗	✓				
<input type="checkbox"/>	EUC check sales order	✓	✗	✓				
<input type="checkbox"/>	End customer check	✓	✗	✓				
<input type="checkbox"/>	End customer check sales order	✓	✗	✓				
<input type="checkbox"/>	Notify L-TEK when wanted date is changed	✗	✓	✓				
<input type="checkbox"/>	Notify invoicing when pickup task closed	✗	✓	✓				
<input type="checkbox"/>	Notify logistic manager when product without serials created	✗	✓	✓				
<input type="checkbox"/>	Notify logistic manager when product without serials created	✗	✓	✓				
<input type="checkbox"/>	Notify production manager when confirmed date is changed on L-TEK purchase orders	✗	✓	✓				
<input type="checkbox"/>	Notify project owner when note added	✗	✓	✓				
<input type="checkbox"/>	Notify project owner when status changed	✗	✓	✓				
<input type="checkbox"/>	Prevent creating license if DWL and Ulyssix	✓	✓	✗				
<input type="checkbox"/>	Prevent development status change if no file on product	✓	✗	✓				
<input type="checkbox"/>	Product status changed	✓	✓	✓				
<input type="checkbox"/>	Sales price to low notification	✓	✓	✓				
<input type="checkbox"/>	Send email to import/export when sales							

Event actions should only be added by administrators with access to the code base, due to class names and their full paths being mandatory when creating new event actions. That information is only available to developers.

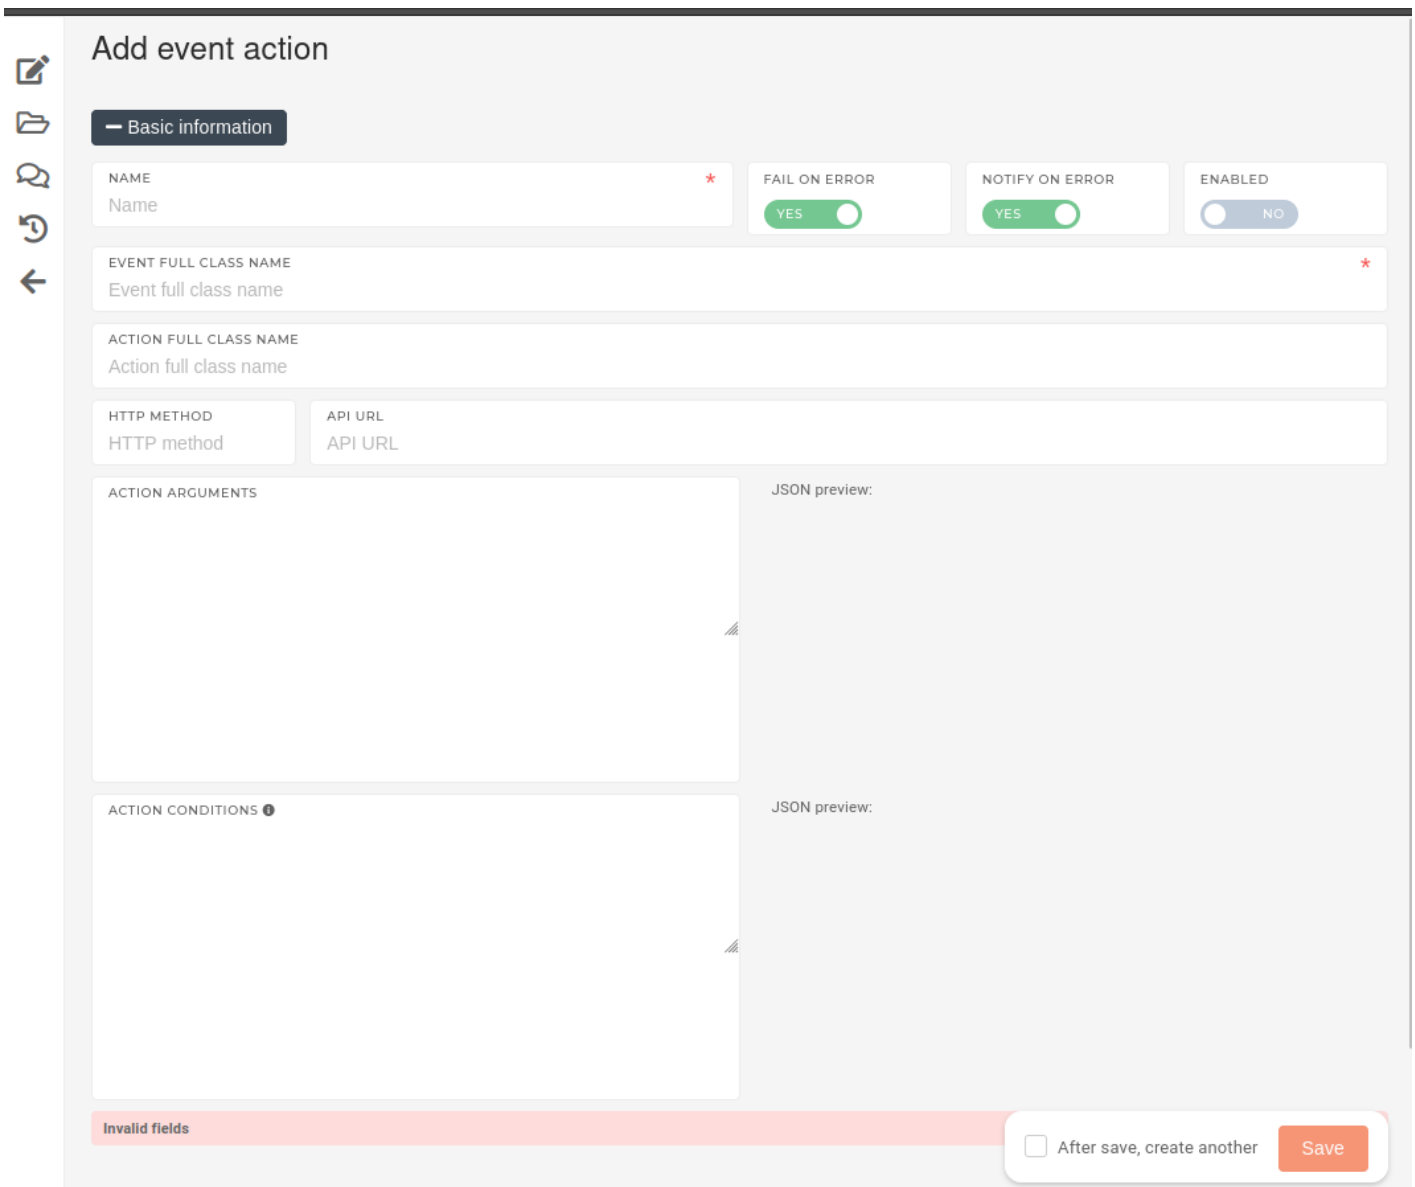


The image shows a web form titled "Add event action". On the left side, there is a vertical toolbar with icons for editing, saving, undo, redo, and a back arrow. The form has a tabbed interface with the "Basic information" tab selected. It contains several input fields: "NAME" (with a red asterisk), "EVENT FULL CLASS NAME" (with a red asterisk), "ACTION FULL CLASS NAME", "HTTP METHOD", "API URL", "ACTION ARGUMENTS" (a large text area), and "ACTION CONDITIONS" (with a help icon). There are also three toggle switches: "FAIL ON ERROR" (set to YES), "NOTIFY ON ERROR" (set to YES), and "ENABLED" (set to NO). A "JSON preview:" label is visible next to the arguments and conditions fields. At the bottom, there is a red "Invalid fields" message, a checkbox for "After save, create another", and a "Save" button.

The creation form consists of several fields, required for creation of a new event action:

- **Name:**
 - The name of an event actions should be **simple and descriptive**, making it easy to figure out an event action's function from name alone (eg. *Send email to user when new order is created*).

With the name set, the event that triggers the event action and the action that is performed by the event action need to be defined.

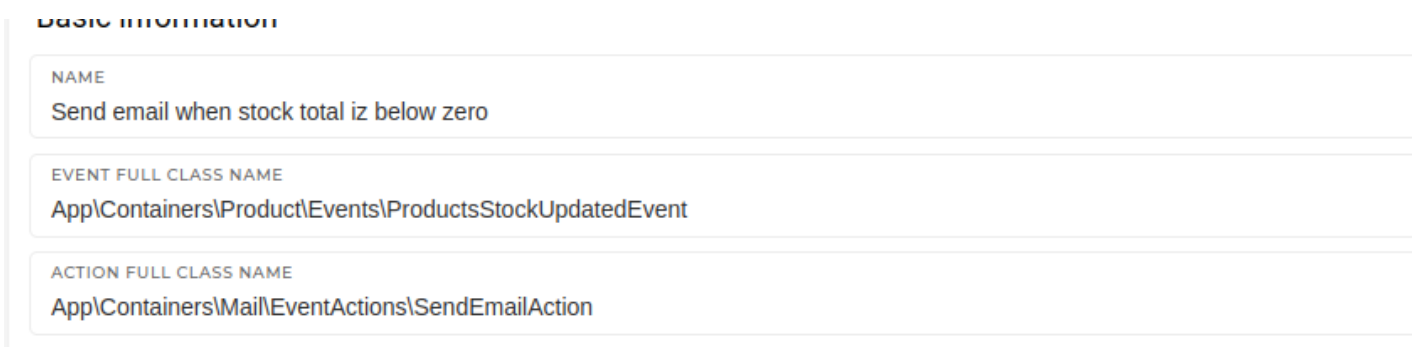

The image shows a "Basic information" form with three input fields. The first field is labeled "NAME" and contains the text "Send email when stock total iz below zero". The second field is labeled "EVENT FULL CLASS NAME" and contains the text "App\Containers\Product\Events\ProductsStockUpdatedEvent". The third field is labeled "ACTION FULL CLASS NAME" and contains the text "App\Containers\Mail\EventActions\SendEmailAction".

- **Event full class name:**

- A full path (namespace and class name) of the Event class that needs to be triggered to perform the event action (eg. *App\Containers\Product\Events\ProductsStockUpdatedEvent*).

- **Action full class name:**

- A full path (namespace and class name) of the Action class that will run once the Event is triggered. (eg. *App\Containers\Mail\EventActions\SendEmailAction*).

With the name, event and action defined, the three top switches can be toggled on/off.

<div><div>FAIL ON ERROR</div><div><div></div>NO</div></div>	<div><div>NOTIFY ON ERROR</div><div><div>YES</div></div></div>	<div><div>ENABLED</div><div><div>YES</div></div></div>
---	--	--

- **Enabled:**

- Toggle an event action as active or inactive. Inactive event actions will never run.

- **Fail in error:**

- When this switch is toggled on, the action will be performed as normal, but will stop **immediately** on encountering an error.

- **Notify on error:**

- When this switch is toggled on, whenever the event action encounters an error, an email is sent to the development team to inform them of a failure when performing the event action.

Event actions can also be used to **call external services** via **API** calls when conditions are met.

<div><div>HTTP METHOD</div><div>HTTP method</div></div>	<div><div>API URL</div><div>API URL</div></div>
---	---

- **HTTP Method:**

- The method of the API call. Valid call methods include **POST, GET, PUT, PATCH, and DELETE**.

- **API URL:**


- The URL of the external service API that will be called. Should be in format: **https://[service]/[endpoint]**

Arguments and **conditions** (currently) need to be written in **JSON format**.

<div><div>ACTION ARGUMENTS</div><div><pre>{ "to": "purchasing@dewesoft.com", "html": "New consumable order \${orderConsumable.document_number} was created.", "subject": "\${orderConsumable.document_number} created" }</pre></div></div>	<div><div>JSON preview:</div><div><pre>{ "to": "purchasing@dewesoft.com", "html": "New consumable order \${orderConsumable.document_number} was created.", "subject": "\${orderConsumable.document_number} created" }</pre></div></div>
--	--

• ARGUMENTS:

- Available arguments depend on selected **"action class"**. This data can be provided by people with access to the codebase.
- eg. **SendEmailAction** class requires:
 - **"to"**: the email that will receive the notification email
 - **"html"**: the content of the email in HTML
 - **"subject"**: the subject of the email to be sent

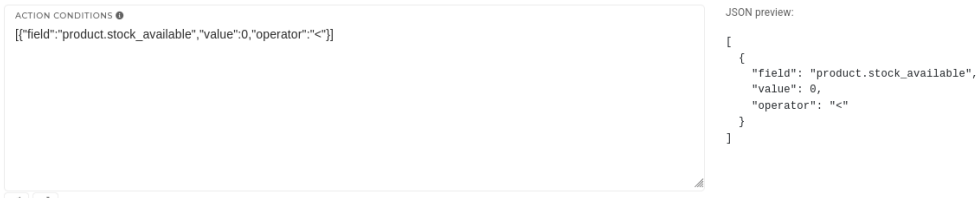

• CONDITIONS:

- Available conditions depend on selected **"event class"**. This data can be provided by people with access to the codebase.
- **The example in the photo checks if a product's stock_total is lower than 0**
- eg. The **ProductsStockUpdatedEvent** class has access to the product object, so we can build conditions with fields of a product, eg. product's **"stock_total"**.
 - We can set a condition by making a JSON object that includes product's:
 - **"field"**: Any field of a product model record (sku, name, short_name, id, ...)
 - **"value"**: The value that the field will be compared to
 - **"operator"**: The operation to run (the way to compare the value and the field)

AVAILABLE CONDITION OPERATORS:

"=" or "==="	Check if the field and value are the same. (strict comparison by value and by type)
"=="	Check if the field and value are the same.
"!=="	Check if the field and value are not the same. (strict comparison by value and by type)
"!="	Check if the field and value are not the same.
"<"	Check if the field is less than the value.
">"	Check if the field is more than the value.
"<="	Check if the field is less than or equal to the value.
">="	Check if the field is more than or equal to the value.

IN	Check if field is one of values in array. Value must be array here.
NOT IN	Check if field is not one of values in array. Value must be array here.
CONTAINS	Check if field contains the value.
DOES_NOT_CONTAIN	Check if field does no contains the value.
IS_TABLE	Check if the record's table is equal to value.
STARTS_WITH	Check if the field starts with value. Field and value must be strings in this case
ENDS_WITH	Check if the field end with value. Field and value must be strings in this case

Revision #22
Created 10 May 2024 12:01:57 by Admin
Updated 22 April 2025 10:53:51 by Doc Administrator